

AUTOMATIC CASE PACKERS



SOLVING COMPLEXITY WITH ENGINEERING AND EXPERIENCE



SEAMLESS TRANSITION FROM CASE ERECTING TO PRODUCT LOADING

Once the foundation of case erection has been established, the next process to upgrade in your packaging automation journey is getting your products into the case. Performing this task manually has the same fundamental drawbacks of any process that relies primarily on human involvement: throughput is slow, quality is inconsistent, and the headaches and costs associated with labor are painful.

Automating the case packing process addresses these deficiencies but presents a complex challenge that must be met with a combination of product capabilities and, just as importantly, specific knowledge that only comes from experience. At Combi, we understand that each application is unique. Successful case packing requires expertise in material handling to ensure your products are effectively oriented and presented prior to loading as well as integration know-how to coordinate upstream and downstream processes.

Additionally, Combi's case packing portfolio is not limited to a single technology unlike some other companies in the industry.

We can bring to bare a full range of options to provide the best solution depending on your product format, mix, production speed requirements, floor space constraints, and budget.



For more delicate or precise placement requirements, our Pick and Place systems offer unmatched performance. Utilizing an automated arm equipped with custom tooling, this system picks products from an infeed conveyor and carefully places them into awaiting cases staged on a parallel conveyor.

Our well-known Alphapack series, which includes an integrated case erector, and the standalone SPP line both support speeds up to 20 cases per minute, combining precise product handling with swift production rates.




Engineered for both speed and accuracy, our drop packers are the pinnacle of high-throughput packaging. Products are presented above an open case before being gently "dropped". Our Drop Packers are available with an integrated case erector to minimize cost and footprint with models capable of speeds up to 30 cases per minute. We also offer standalone drop packers that can be fed from an independent case erector capable of speeds up to 50 cases per minute.



Some products require a horizontal packing approach due to their shape or orientation sensitivity.

Combi's horizontal loaders are specifically designed for such applications and are available with or without integrated case erectors and capable of managing up to 8 cases per minute, ensuring even the most uniquely shaped products are packed with precision.

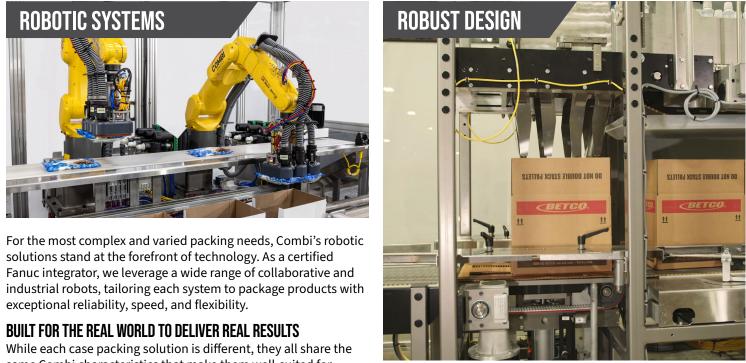


same Combi characteristics that make them well-suited for success in an actual production environment:

By choosing Combi, you're not just selecting a machine; you're partnering with a leader in packaging with a deep-rooted history of innovation. Our experience, coupled with an unwavering dedication to solving your packaging challenges, ensures that every case is a showcase that you can be proud of.

FEATURES & OPTIONS

- An uncompromising focus on safety
- > Heavy duty construction that is designed for maximum reliability
- > Compact footprint to minimize floor space requirements
- Fast and easy changeovers enhancing flexibility
- User friendly with an intuitive HMI and simple mechanical adjustments
- Excellent value that delivers a significant return on investment

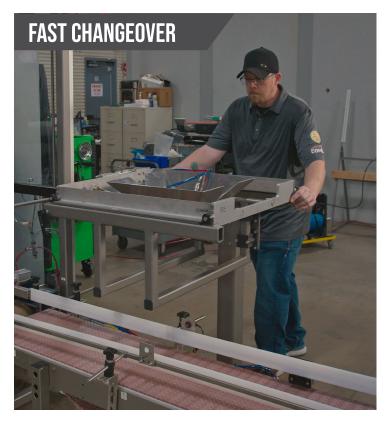



DROP PACKER MODEL SPECIFICATIONS							
SPECIFICATIONS	DPI	DPI XL	DP 10	DP 12	DP 15	DP 19	DP 20
Integrated Case Erector	N	N	Y	Y	Y	Y	Ŷ
Bottom Case Sealing	N/A	N/A	N	Ν	Y	Ν	Y
Max. Speed	25-50 CPM	25-50 CPM	10 CPM	12 CPM	15 CPM	19 CPM	20 - 30 CPM
Max. Case Range	20" x 14" x 18"	24" x 16" x 18"	24" x 16" x 18"	19" x 13.5" x 18"	24" x 16" 18"	19" x 13.5" x 18"	24" x 16" x 18"
Min. Case Range	8" x 6" x 5"	8" x 6" x 5"	13" x 7.75" x 6"	8.5" x 4.75" x 4"	8" x 6" x 5"	8" x 6" x 5"	8.5" x 4.75" x 4"
Magazine Capacity	N/A	N/A	50" ~150 Cases	50" ~150 Cases	50" ~150 Cases	N/A	50" ~150 Cases
Case Modification Available	N/A	N/A	Ν	Ν	Y	N/A	Y
Washdown Option	IP54	IP54	IP54	IP54	IP54	IP54	IP54
Glue Version	N/A	N/A	Y	Y	N	N/A	Ν
Opposite Case Hand Option	N/A	N/A	N	N	Y	N/A	Y
Std. Voltage	240V/3PH	240V/3PH	240V/3PH	240V/3PH	240V/3PH	240V/3PH	240V/3PH
SCFM - 80 PSI - 3/4 Supply Line	84 SCFM	84 SCFM	17 SCFM	20 SCFM	13 SCFM	30 SCFM	17 SCFM
Footprint	9'7" x 6'6" x 10'7"	12' x 7'5" x 12'	8'3" x 10'6" x 10'7"	8'3" x 10'6" x 10'7"	13'6" x 10'7" x 7'4"	14'3" x 5'8" x 11'10"	8'3" x 10'6" x 10'7"
Approx. Shipping Weight	~2500 lbs.	~2500 lbs.	~4000 lbs.	~4000 lbs.	~4500 lbs.	~4000 lbs.	~4500 lbs.
Std. Finish	Steel Plus 316 is a two component, water base epoxy filled with 316 stainless steel flake. Finish Color is a Steel-It Grey and is USDA and FDA accepted.						
Controls	AB COMPACT LOGIX PLC with PV+ Color TS						